

## Plastic Flowmeter

### LZB-()S series plastic flowmeter

#### S a

LZB-()S plastic tube flowmeter is featured with light weight, corrosion resistant, unbreakable, innoxious, tasteless and convenient. It is widely used in chemical industry, light industry, pharmacy, food, environment protection etc.

#### O e a d I a a S e

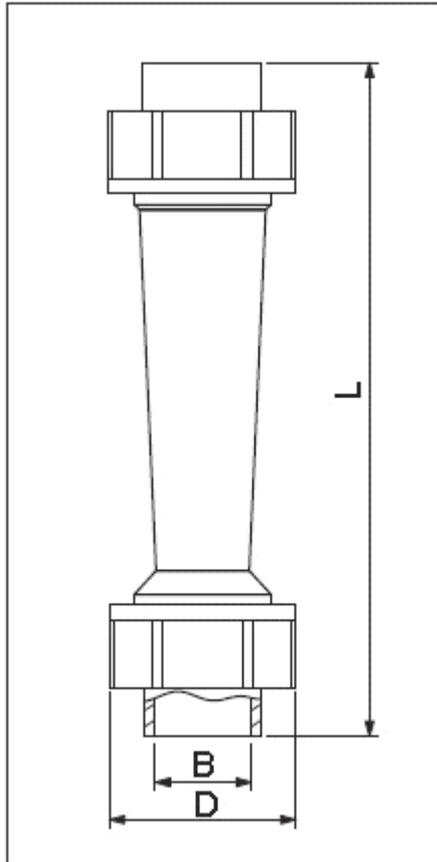


Fig.1

Table 1

Parts	Materials
Bolts	ABS
Stop	
Float	
Connection	
Taper tube	AS
Seals	NR

## Plastic Flowmeter

### Technical Parameters

Short tube type										
DN(mm)	Model	Measuring range	Size(mm)			Welding pipe size(mm)	Threaded pipe size(mm)	Accuracy	Pressure (MPa)	Temperature ( )
			L	B	D					
15	LZB-15S	6~60L/h	200	20	45	20	G1/2"	4	0.6	0~40 Medium is water, weak acid, weak base
		10~100L/h								
25	LZB-25S	0.1~1m <sup>3</sup> /h	226	32	60	32	G3/4"			
		0.16~1.6m <sup>3</sup> /h								
		0.25~2.5m <sup>3</sup> /h								
32	LZB-32S	0.3~3m <sup>3</sup> /h	288	40	74	40	G1"			
		0.4~4m <sup>3</sup> /h								
50	LZB-50S	0.6~6m <sup>3</sup> /h	341	63	98	63	G1 1/2"			
		1~10m <sup>3</sup> /h								
65	LZB-65S	1.6~16m <sup>3</sup> /h	430	75	122	75	G2"			
		5~25m <sup>3</sup> /h								
		8~40m <sup>3</sup> /h								
		12~60m <sup>3</sup> /h								


Long tube type										
DN(mm)	Model	Measuring range	Size(mm)			Welding pipe size(mm)	Threaded pipe size(mm)	Accuracy	Pressure (MPa)	Temperature ( )
			L	B	D					
15	LZB-15SL	10~100L/h	280	20	45	20	G1/2"	4	0.6	0~40 Medium is water, weak acid, weak base
		16~160L/h								
		25~250L/h								
		40~400L/h								
		60~600L/h								
25	LZB-25SL	100~1000L/h	380	32	68	32	G3/4"			
		160~1600L/h								
		250~2500L/h								
		300~3000L/h								
50	LZB-50SL	0.4~4m <sup>3</sup> /h	435	63	98	63	G1 1/2"			
		0.6~6m <sup>3</sup> /h								
		1~10m <sup>3</sup> /h								
		1.6~16m <sup>3</sup> /h								



Chengfeng Flowmeter

# Plastic Flowmeter

O e a d I a a S e

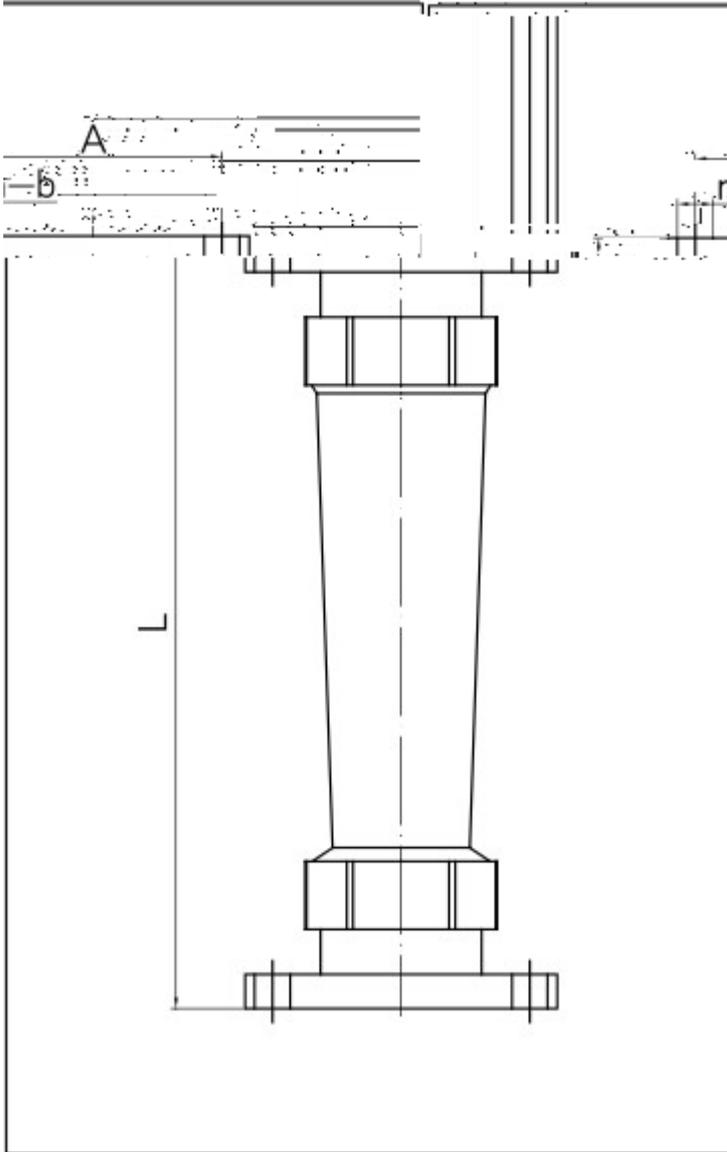

Chang Chengfeng Flowmeter Co., Ltd

Te :86-519-85327611(Ex. 2) Shanghai :86-519-85503588/85503688

Fa :86-519-85505269,86-519-85503588-8008 H :// . f - e e . c



**Plastic Flowmeter**

**Technical Parameters**

Flange type								
DN(mm)	Model	Measuring range	Size(mm)			Accuracy	Pressure (MPa)	Temperature( )
			L	A	n-d			
15	LZB-15S	6~60L/h	240	65	4- 14	4	0.6	0~40 Medium is water,weak acid,weak base
	LZB-15SL	10~100L/h	320					
25	LZB-25S	0.1~1m <sup>3</sup> /h	282	85	4- 14			
	LZB-25SL	0.16~1.6m <sup>3</sup> /h 0.25~2.5m <sup>3</sup> /h	432					
32	LZB-32S	0.4~4m <sup>3</sup> /h 0.6~6m <sup>3</sup> /h	351	100	4- 18			
50	LZB-50S	1~10m <sup>3</sup> /h	425	125	4- 18			
	LZB-50SL	1.6~16m <sup>3</sup> /h	519					
65	LZB-65S	5~25m <sup>3</sup> /h	528	145	4- 18			
		8~40m <sup>3</sup> /h						
		12~60m <sup>3</sup> /h						
100	LZB-100S	8~50m <sup>3</sup> /h 14~90m <sup>3</sup> /h 16~120m <sup>3</sup> /h	555	180	8- 18			
125	LZB-125S	25~150m <sup>3</sup> /h 25~180m <sup>3</sup> /h 25~200m <sup>3</sup> /h	555	210	8- 18			
150	LZB-150S	25~150m <sup>3</sup> /h 25~180m <sup>3</sup> /h 25~200m <sup>3</sup> /h	555	240	8- 22			

**Chang Chengfeng Flowmeter Co., Ltd**

Te :86-519-85327611(E De ) S chb a d:86-519-85503588/85503688

Fa :86-519-85505269,86-519-85503588-8008 H :// . f - e e . c